

Typical Manholes

FLXX®



FLXX®

All concrete, reinforcing, steps and sealant meet or exceed ASTM C-478 specifications
(see details pages 91 - 97, 100 - 102).



48" I.D.

60" I.D.



GRADE ADJUSTMENT RINGS






CONE SECTIONS

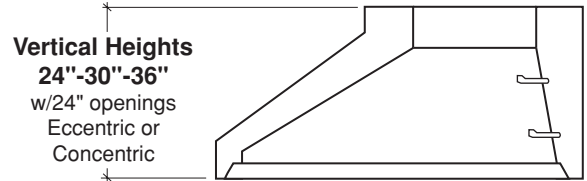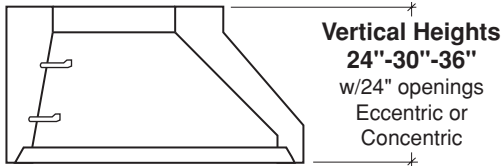

RISER SECTIONS

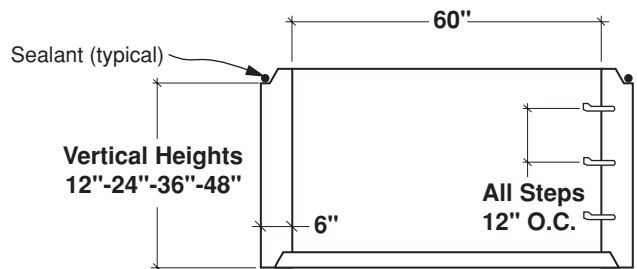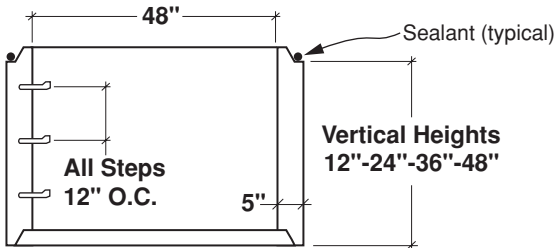

BOTTOM SECTIONS

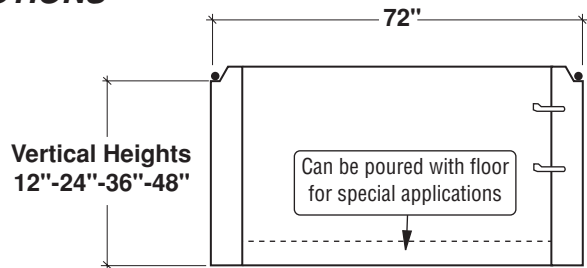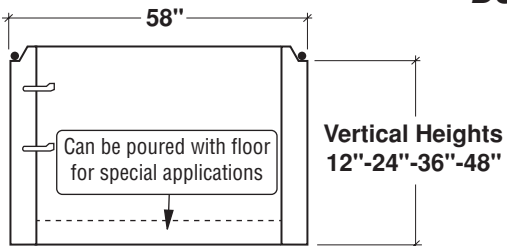

	Capacity/Vertical Ft.	Weight/Vertical Ft.
48" I.D.	94 Gal.	864 lbs.
60" I.D.	146 Gal.	1,296lbs.

Note: N.T.S.

FLXX® 
Watertight
Front Range Precast Concrete, Inc.
 5901 Dexter Street, Unit 200, Commerce City, CO 80022
 Phone (303) 442-3207 • (800) 783-3207 • Fax (303) 442-3209
www.flxx.com